



Electric Push Rod

CyberBrick Version - PG003

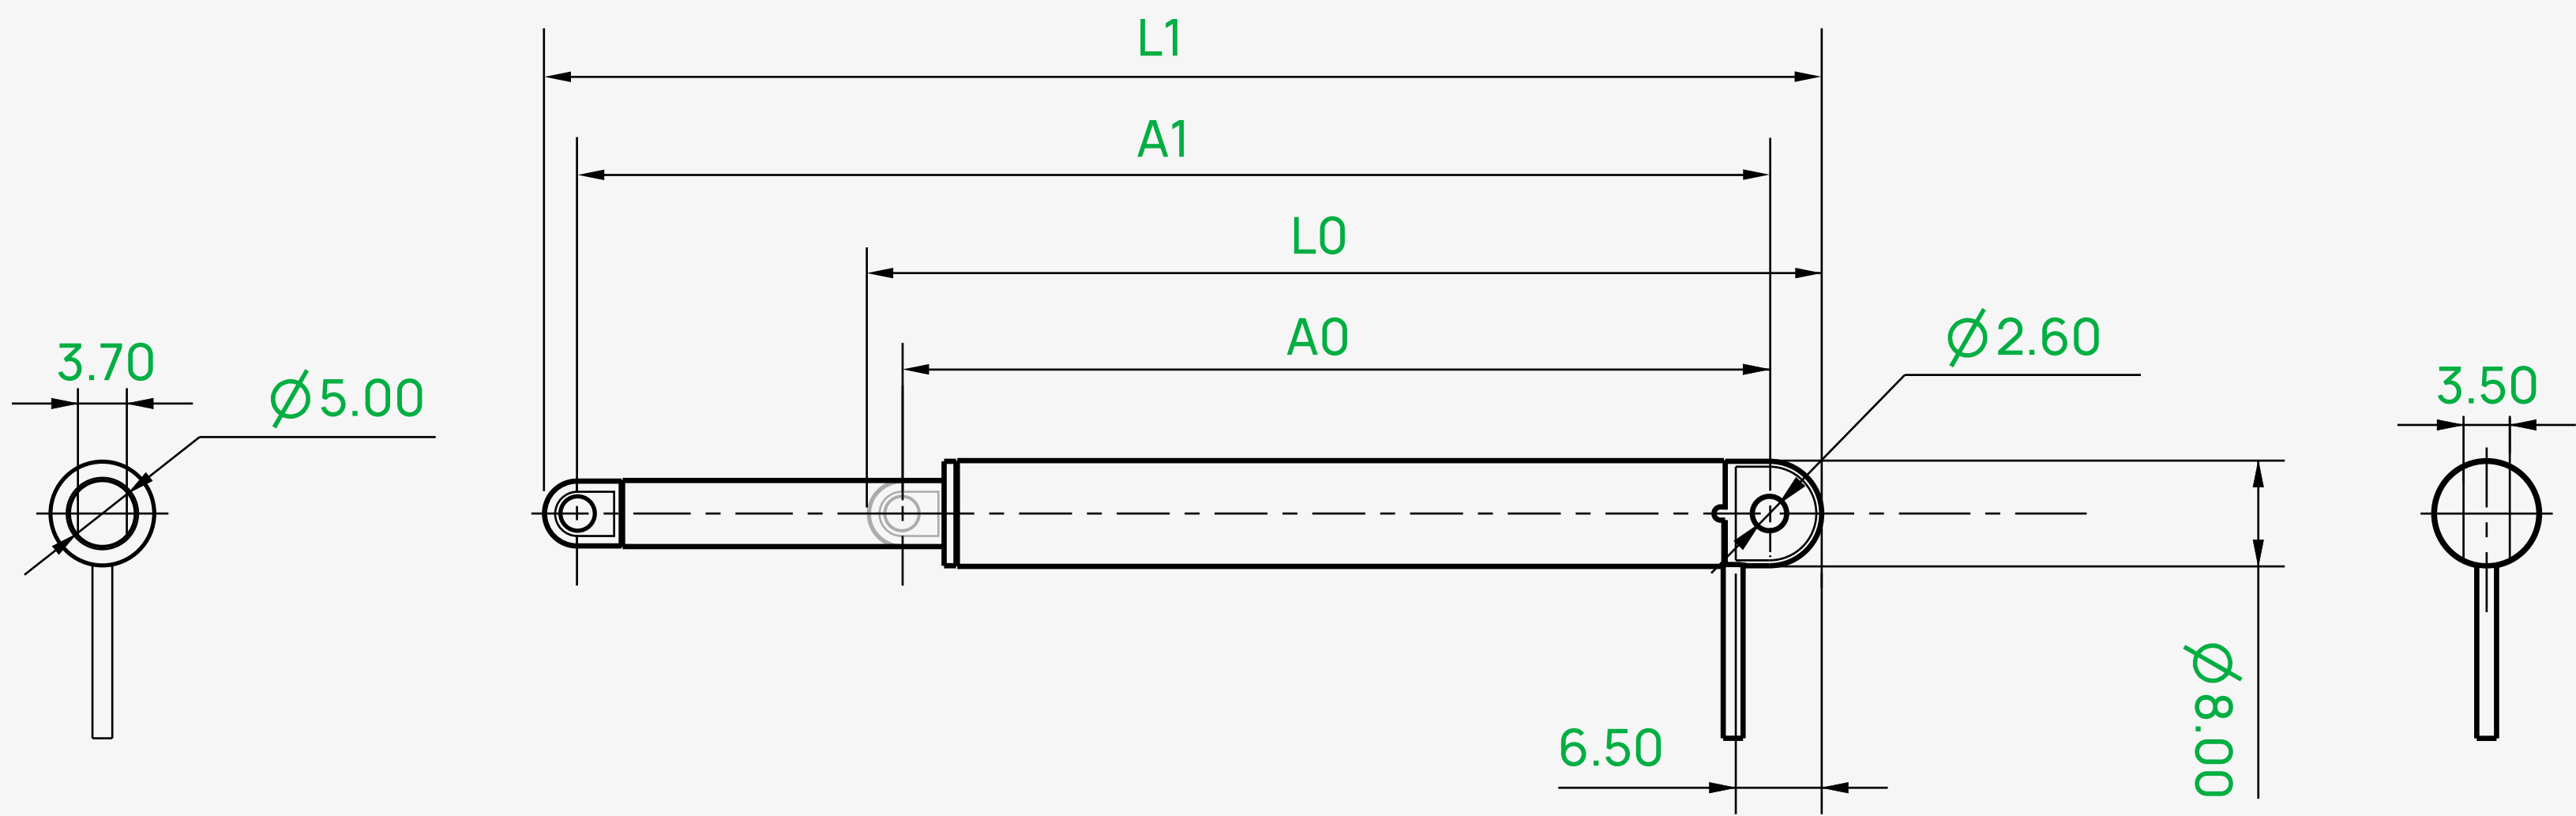

Standard Version - LA010 & LA011

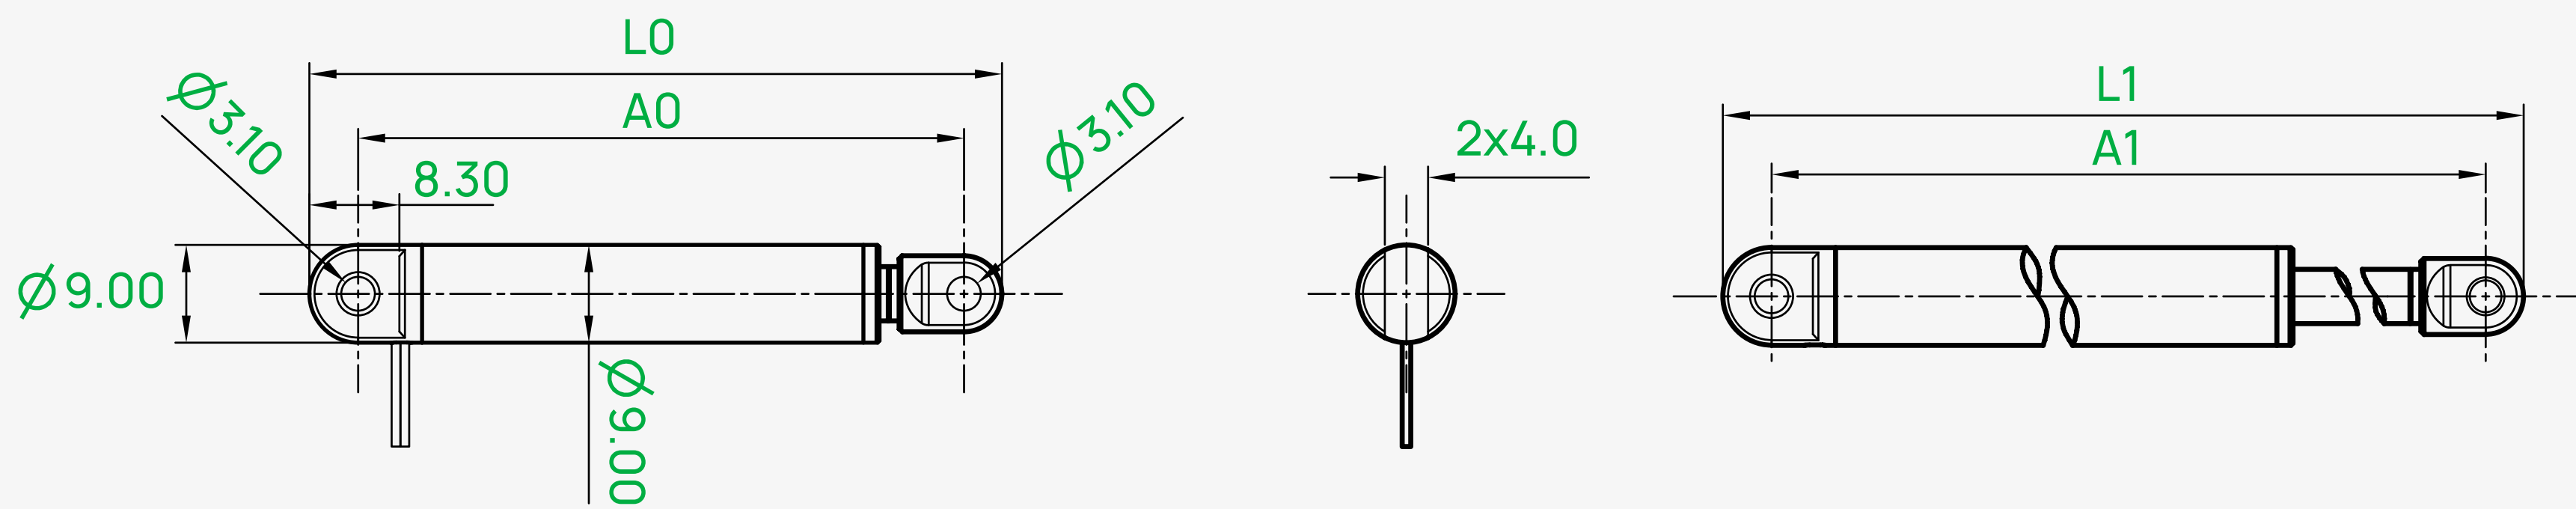

Product ID	Le (mm) Stroke Length	L0 (mm) Retracted Length	L1 (mm) Extended Length	A0 (mm)	A1 (mm)
LA010	25	79	104	71	96
LA011	60	114	174	106	166
PG003	25	71.63	96.63	65.18	90.18

Basic Information

Product ID	Material	Force	No-load Speed	Rated Voltage	Maximum Current
LA010	Stainless Steel, Lead-free Copper (Nickel-plated)	2.5 KG	2.5 mm/s	DC 5V	0.25A
LA011	Stainless Steel, Lead-free Copper (Nickel-plated)	2.5 KG	2.5 mm/s	DC 5V	0.25A
LA010	Stainless Steel, Lead-free Copper (Nickel-plated)	2.5 KG	6.25 mm/s	DC 5V	0.36A

Product Feature

- Protective design prevents motor wire breakage
- ROHS2.0 compliant, ensuring safety and environmental friendliness
- Energy Efficient
- Rotatable telescopic rod for versatile applications and flexible operation