


1 打印 Print



您可以使用打印机在A纸（打印纸）的光滑的一面打印图像。
(打印设置：选择高质量光泽纸)

You can use a printer to print images on the smooth side of A paper (printing paper).
(Print settings: select high-quality glossy paper.)


2 覆膜 Lamination

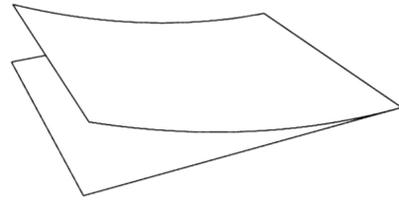

当打印图案干燥后，剥离胶膜（B纸）纸底的一个小角，然后贴在打印纸（A纸）图案的一个角。最后慢慢撕开胶膜的全部底纸直到与打印纸的打印面完全贴合。

After the printed pattern has dried, peel off a small corner of the backing of the adhesive film (B paper), then stick it to a corner of the printed image on the printing paper (A paper). Finally, slowly peel off the entire backing of the adhesive film until it is fully adhered to the printed surface of the printing paper.


3 刮气泡 Remove air bubbles by scraping

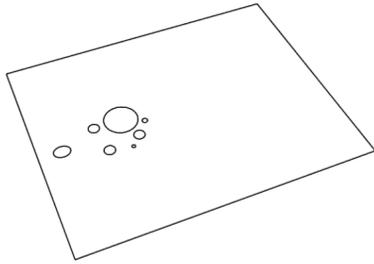

使用刮板用力刮胶膜（B纸），以固定胶与打印的图案完全贴合，确保没有气泡。

Use a squeegee to firmly scrape the adhesive film (B paper) to ensure the adhesive fully adheres to the printed pattern and to make sure there are no air bubbles.


4 裁剪和剥离胶膜 Cut and peel off the adhesive film

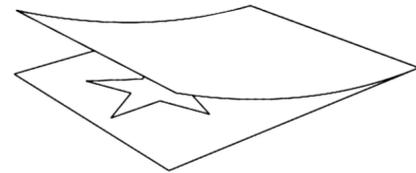

剪下你想要的图案，并揭开图案上的胶膜。

Cut out the pattern you want, and peel off the adhesive film on the pattern.


5 贴图案 Apply the pattern

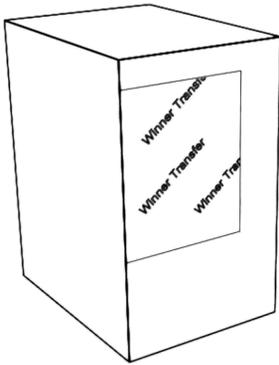

图案贴在物品上并均匀按压。

Stick the pattern onto the item and press evenly.


6 转印 Transfer printing

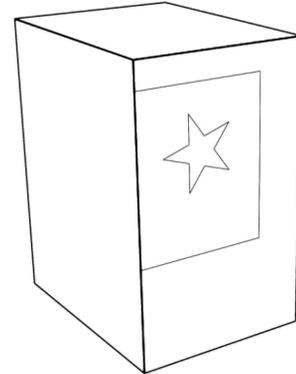

用湿纸巾盖住图案并按压15-30秒。

Cover the pattern with a wet wipe and press for 15-30 seconds.


7 揭离背纸 Remove the backing paper

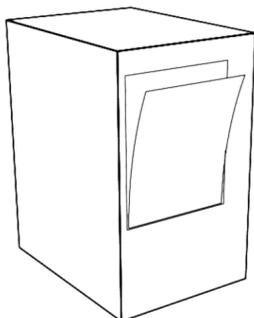

当发现图案的背纸已经可以轻松地从图案上分离，我们就可移动揭离背纸。

When you find that the backing paper of the pattern can be easily separated from the pattern, you can start removing the backing paper.

8 完成 Complete

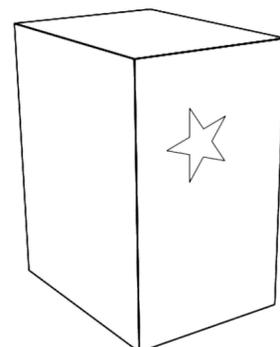

恭喜！你的转印工作已经完成，转印图案不可用力清洗。

Congratulations! Your transfer work is complete. Do not wash the transfer pattern with force.